



MODEL 349 PRESSURE TRANSMITTER

- 💧 0-5 thru 0-100K PSI
- 💧 Compact and lightweight
- 💧 All welded, stainless steel construction
- 💧 Internal shunt calibration
- 💧 Sealed zero and span adjustments

The Model 249/349 Series from Viatran is a family of robust, high-accuracy pressure transmitters. They are designed to provide reliable, repeatable pressure measurements within demanding aerospace and engine testing, as well as fluid power control applications.

PERFORMANCE

Full Scale Pressure Ranges	0-5, 15, 25, 50, 100, 200, 300, 500, 1000, 1.5K, 2K, 3K, 5K, 7.5K, 10K, 15K, 20K, 25K, 30K, 40K, 50K, 60K, 75K, 100K PSIA, PSIS, PISG
Combined Accuracy (BFSL) (Non-Linearity, Hysteresis & Repeatability)	$\leq \pm 0.25\%$ FSO
Full Scale Output (FSO)	16 mA
Resolution	Infinite
Compensated Temperature Range	-40°F to 140°F (4°C to 60°C)
Operating Temperature Range	-40°F to 185°F (-40°C to 85°C)
Storage Temperature Range	-67°F to 302°F (-55°C to 150°C)
Long Term Stability (%FSO)	$\leq \pm .25\%$ FSO per 6 months
Thermal Effect on Zero	$\leq \pm 1\%$ FSO per 100°F Typical
Thermal Effect on Span	$\leq \pm 1\%$ FSO per 100°F

ELECTRICAL

Output Signal	4-20 mA
Supply Voltage	9-40 Vdc
Power Supply Regulation	$\leq \pm .01\%$ FSO per volt
Load Impedance	1500 Ohms max at 40 Vdc max
Circuit Protection	Reverse polarity protected
Voltage Spike Protection	Withstand 1000 volt spike per EN 61000-4-5
Insulation Resistance	< 5 nS to case ground
Response Time	≤ 4 millisecond to reach 90% of FSO
Range Calibration Signal	100% FSO $\pm 10\%$ by exciting pins E&F
Calibration Power Supply Voltage	8.5 -28 VDC
Calibration Signal Accuracy	Readings on calibration certificate are within $\pm 0.2\%$ FSO of actual Cal signal output
Bridge Resistance	5K Ohms, nominal
Standard Electrical Connection	Mates with 6 pin, Hermetic, bayonet style, 303 SST weld mount connector

Pin Outs

Pin A	+Signal
Pin B	-Signal
Pin C	Calibrate
Pin D	Calibrate
Pin E	No connection
Pin F	No connection

MODEL 349 Pressure Transmitter



HIGHLY ACCURATE

Design of the Viatran Model 249/349 Series incorporates three unique sensing technologies, to help achieve maximum transmitter output-for-size and precision measurement accuracy.

For ranges 0-5 to 0-150 PSI, a MEMS-based piezoresistive sensing element offers accurate readings with high over-pressure protection. Bonded foil strain gage elements support models in the 200 to 15K PSI range, where MEMS-based designs can be vulnerable to transient spikes.

For ranges over 20K PSI, Viatran has developed its own proprietary “tube” sensor. Constructed of high-strength stainless steel, the sensor ensures high-accuracy and durability, in applications where traditional diaphragm-type sensors can rupture.

All Viatran Model 249/349 Series pressure transmitters are compact and lightweight, for ease of installation within space constrained areas. The incorporation of welded bodies, stainless steel connectors and sealed adjustments ensure protection from contaminant.

MECHANICAL

Pressure Port:	
5-15K	1/4" NPT female
20K-50K	1/4" F250-C high pressure tube
60K-100K	5/16" F312-C150 high pressure tube
Proof Pressure	
5-150 PSI	3X range minimum
151-15K PSI	1.5X range
20K-100K PSI	1.2X range
Burst Pressure	
5-150 PSI	Consult factory
151-15K PSI	5X range or 30K PSI, whichever is less
20K-100K PSI	1.5X range or 125K PSI, whichever is less
Pressure Cavity Volume	
5-150 PSI	0.25 cubic inch
200-15K PSI	0.32 cubic inch
10K-100K PSI	0.10 cubic inch

MATERIALS OF CONSTRUCTION

Wetted Materials	
5-150 PSI	316, 304 Stainless Steel
200-15K PSI	15-5PH Stainless Steel
20K-100K PSI	13-8 Mo Stainless Steel
Enclosure Material	316L Stainless Steel
Identification	Laser marked on body of unit
Weight	15 oz. nominal

OPTIONS

BZ	Micro change connector
DG	Improved temperature compensation
DH	Special Range
DK	Special calibration setting
DM	Modified output (i.e., 0-10Vdc)
DN	Improved accuracy
DQ	Cleaning for oxygen service
EA	Special Calibration run
NH	Customer specific identification
PW	Meter with unit
YA	MS33649-04
YG	MS16142-04
YI	1/8" NPT (F)
YK	1/4" NPT (M)
YM	1/4" F250-C High pressure tube
YN	3/8" NPT (F)
YS	5/16" F-375-C High pressure tube
YR	1/2" NPT (F)
YV	MS33649-08

MODEL 349 Solutions custom-fit to your application



BUILT TO PERFORM

Models 249 and 349 are equipped with electronic linearization, a compensation circuit that corrects for non-linearities in the sensor. Surface-mount technology (SMT) allows this complex circuitry to be incorporated into a small package and yield a linearity specification of $\leq 0.1\%$ FSO (optional to $\leq 0.05\%$).

Encapsulation of PC board surface mount components helps to prevent their damage from severe vibration. Zero and span adjustments allow for user recalibration of the pressure transmitters in the field. An internal calibration circuit permits easy two-point calibration without an external pressure source.

Optional performance features of the Viatran Model 349 series include improved accuracy, temperature compensation, special ranging, modified output, and alternate pressure ports.

APPROVALS

KG	CRN (Canadian Registration Number)
TW	GOST-R Certificate of Compliance

ACCESSORIES

Mounting Bracket
Mating electrical assembly
Digital indicator
DL Series Dual Line, Analog Input Process Meter

Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time.




MODEL 349 Pressure Transmitter

DIMENSIONAL DATA

ALL DIMENSIONS ARE NOMINAL, IN INCHES AND FOR REFERENCE PURPOSES ONLY

AE HIGH PRESSURE CONNECTIONS LISTED ARE REGISTERED TRADEMARKS OF AUTOCLAVE ENGINEERS GROUP, ERIE, PENNSYLVANIA

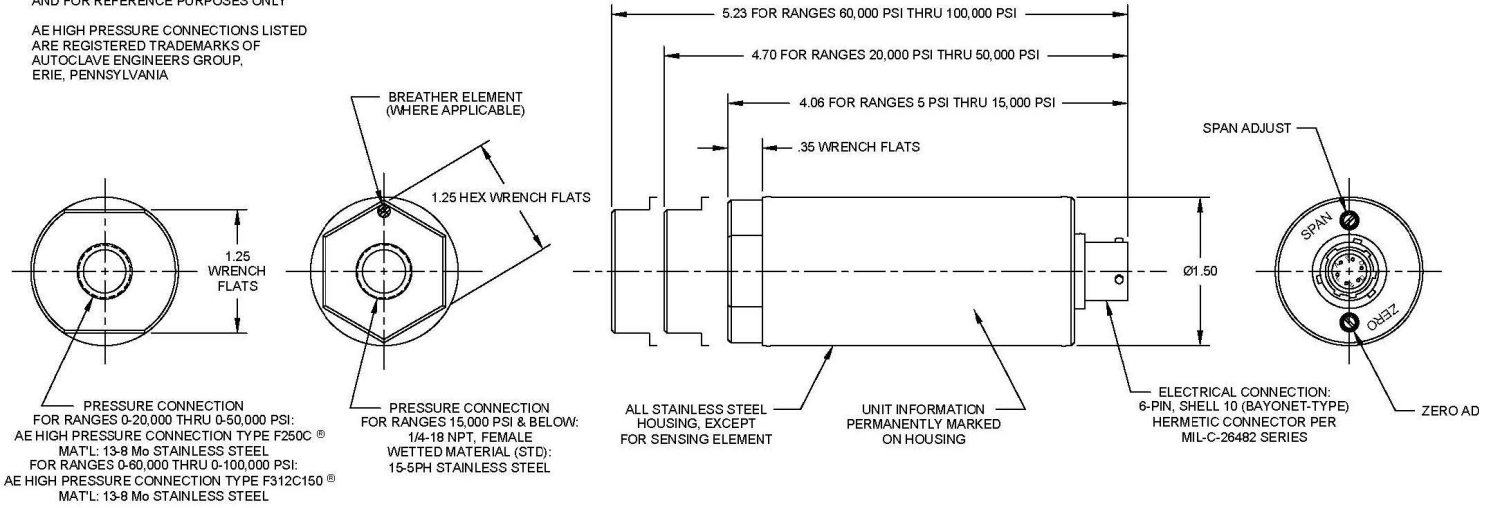

TYPICAL APPLICATIONS

Jet Engine Test

Internal Combustion Engine Test

Rolling Mills

Die Casting

Brake Test

Injection Molding



An ISO 9001:2008 Certified Company
98DS349a