



US Patent 8,823,364 applies




MODEL 4807A ACCELEROMETER

SPECIFICATIONS

- Ultra Low Noise, DC Response
- Micro-g Resolution
- Includes Auto-Zero Function
- Hermetically Sealed
- <2% Total Error Band

The **Model 4807A** is an ultra low noise DC response accelerometer offering micro-g resolution – an order of magnitude better than the competition. The accelerometer is hermetically sealed and offers an amplified signal output covering ranges from ± 2 to $\pm 200g$. The **model 4807A** incorporates gas damped silicon MEMS sensing elements with wide bandwidth from DC up to 1500Hz, and built-in mechanical overload stops for shock protection to 5,000g. The patented Auto-Zero function allows the user to minimize zero offset at the output.

DIMENSIONS

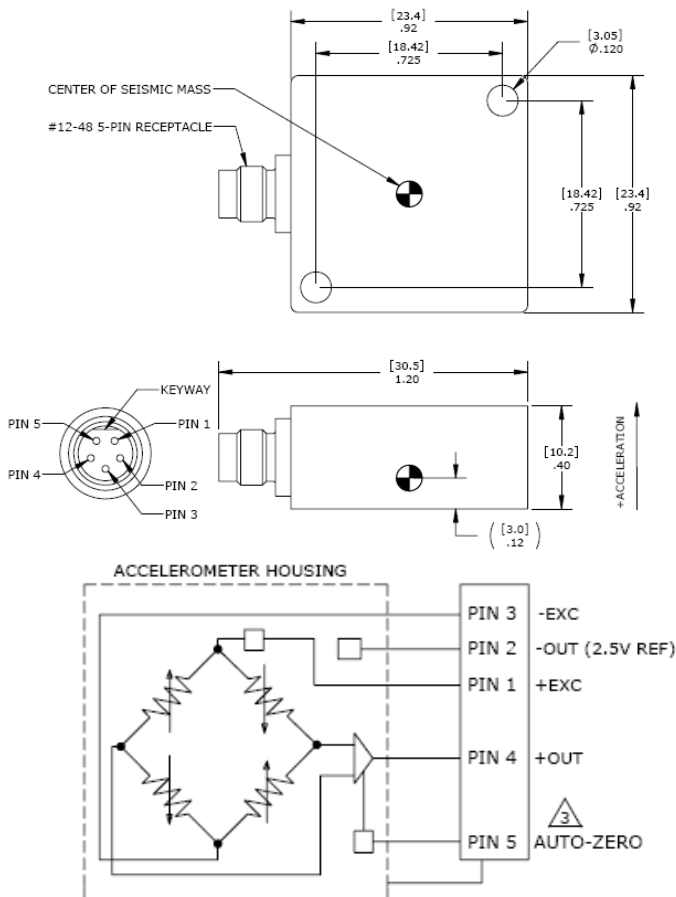

FEATURES

- 98dB Dynamic Range
- $\pm 2g$ to $\pm 200g$ Measurement Range
- 8-20Vdc Excitation Voltage
- Hermetically Sealed
- Gas Damped MEMS Element
- Detachable Cable
- Remote Auto-Zero Function

APPLICATIONS

- Vibration Isolation
- Flight Testing
- Trajectory Profiling
- Structural Monitoring
- Research & Development

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 12Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters								Notes
DYNAMIC								
Range (g)	±2	±5	±10	±20	±50	±100	±200	
Sensitivity (mV/g)	1000	400	200	100	40	20	10	±2%
Frequency Response (Hz)	0-200	0-300	0-350	0-600	0-800	0-1300	0-1500	±5%
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	8000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.6	0.5	0.4	
Shock Limit (g)	5000	5000	5000	5000	5000	5000	5000	
Residual Noise (µV RMS)	25	20	23	31	26	32	32	Passband
Residual Noise (µg/√Hz RMS)	2	3	6	12	21	41	82	Spectral

ELECTRICAL								
Zero Acceleration Output (mV)	±25 (±1.5 after auto-zero actuation)							Differential
Excitation Voltage (Vdc)	8 to 20							
Excitation Current (mA)	15							
Bias Voltage (Vdc)	2.5							
Full Scale Output Voltage (Vpk)	±2							
Output Impedance (Ω)	<100							
Insulation Resistance (MΩ)	>100							@50Vdc
Turn On Time (sec)	<2							
Ground Isolation	Isolated from Mounting Surface							

ENVIRONMENTAL								
Thermal Zero Shift (%FSO)	±2 from -54 to +121°C ref to +24°C							Maximum
Thermal Sensitivity Shift (%)	±2.5 from -54 to +121°C ref to +24°C							Maximum
Operating Temperature (°C)	-54 to 121							
Compensated Temperature (°C)	-54 to 121							
Humidity	Hermetically Sealed, IP67							

PHYSICAL	
Case Material	Stainless Steel
Weight (grams)	20
Mounting	2x #4 or M3 Screws
Mounting Torque	6 lb-in (0.7 N-m)

Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit
Supplied accessories:	AC-A02285	2x #4-40 (7/16 length) Socket Head Cap Screw and Washer
Optional accessories:	AC-D02652	Triaxial Mounting Block
	340A-XXX	Cable Assembly, 4x #28 AWG, (XXX designates length in inches, 5ft standard)
	341A-XXX	Cable Assembly, 5x #30 AWG, for Auto-Zero Option (XXX designates length in inches, 5ft standard)
	121	3-Channel Precision Low Noise DC Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ORDERING INFORMATION

PART NUMBERING Model Number+Range

4807A-GGG

| _____ Range (010 is 10g)

Example: 4807A-010

Model 4807A, 10g

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.