



## DYNALABS PERMANENT MAGNET SHAKER(DYN-PM-20)



Output Force(Sinus)	20 N
Output Force(Shock)	40 N
Frequency Range	0-12 kHz
Payload(Vertical)	0.8 kg
Displacement(P-P)	5 mm
Maximum Acceleration	40 g
Shaker Weight	4.1 kg
Cooling System	Natural Convection
Operating Temperature Range	5-35 °C
Suspension	Spring
Maximum Input Current	4A (RMS)
AMPLIFIER	INTERNAL
Power Supply Voltage	19 V (DC)
Power Supply Current	4.74 A
External Signal Voltage Level	1 VAC(PEAK)

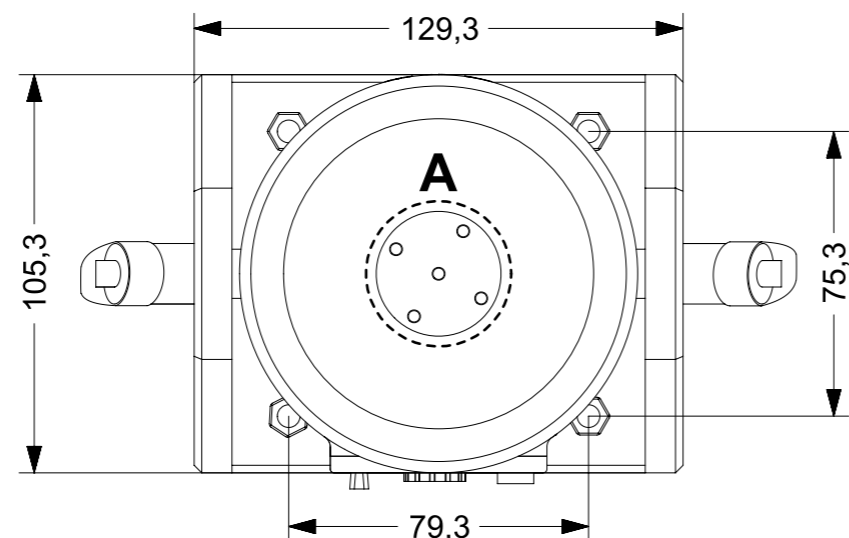

Mounting Interface

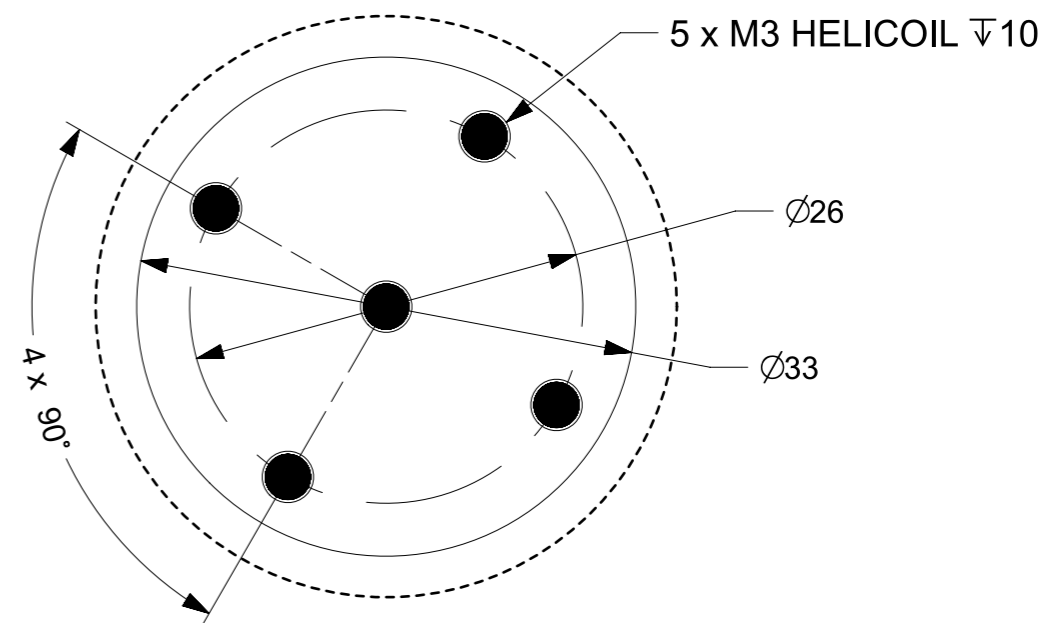

DETAIL-A

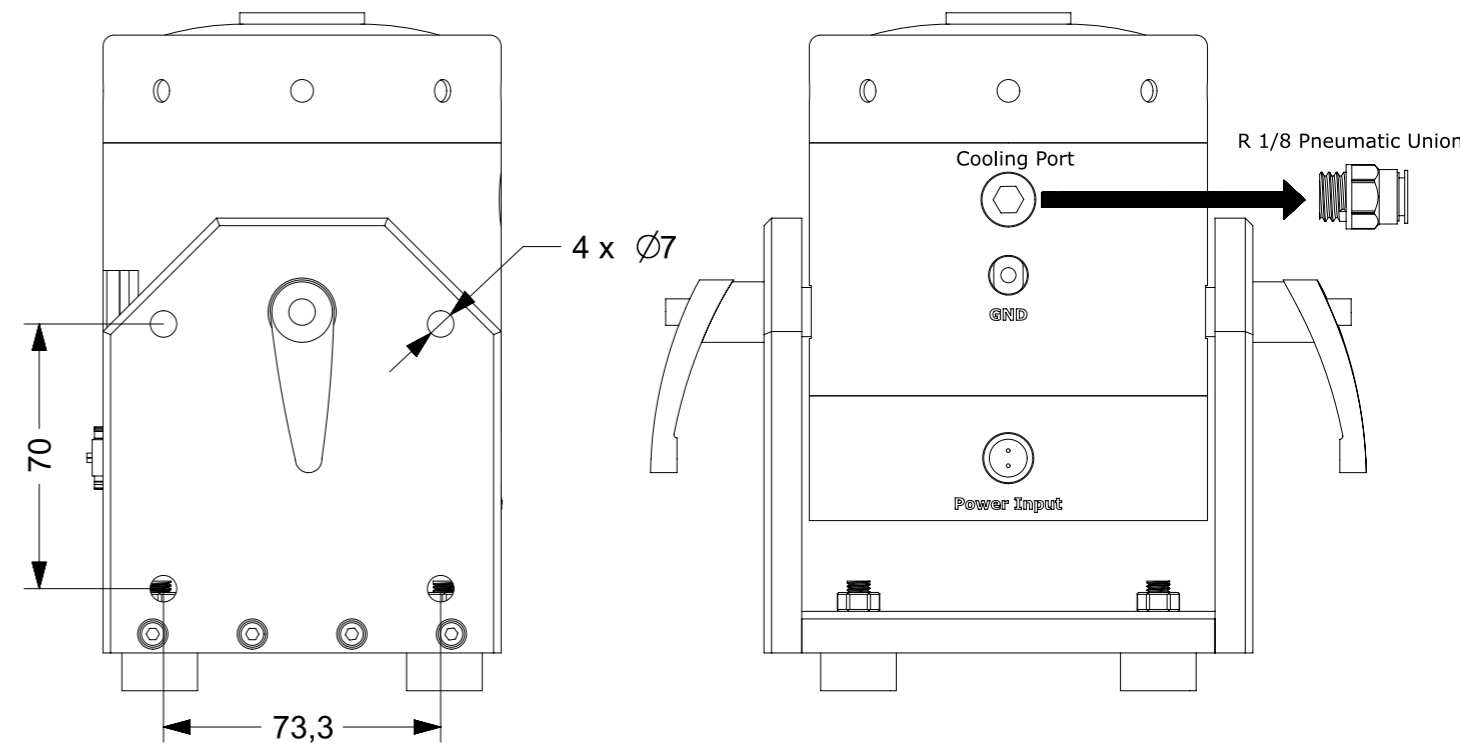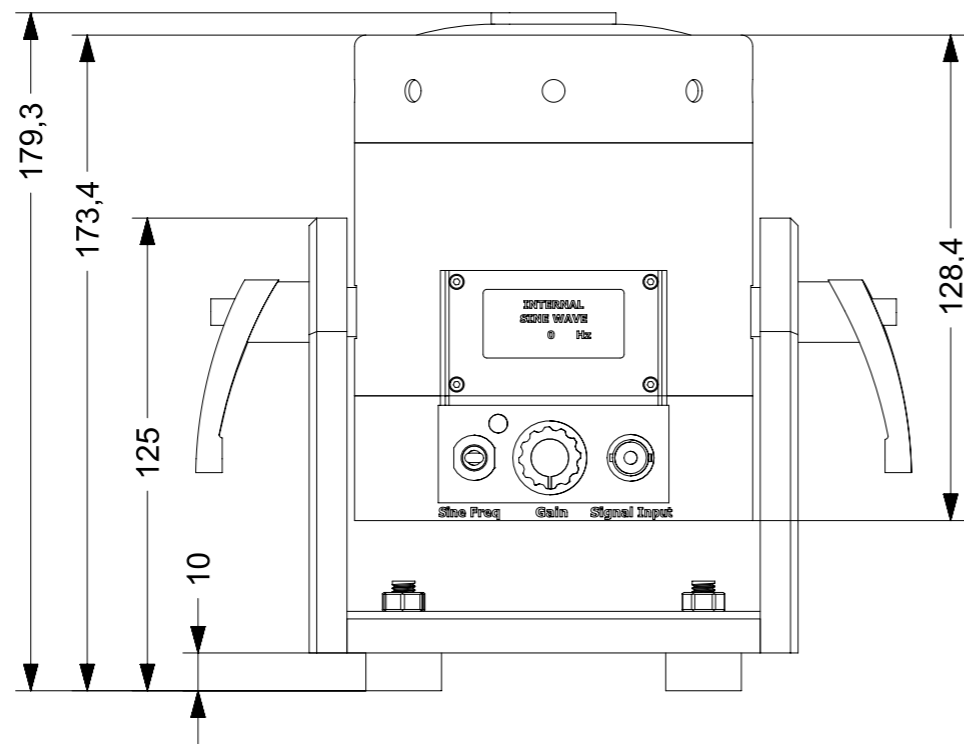

System Components : Electrodynamics Shaker + Power Adapter + Signal Cable(BNC-BNC) + R 1/8 Pneumatic Union + M3X10 Stainless Bolt + User Manual + Ground Cable

All dimensions in mm

All rights reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietors. This document is subject to change without notice, and should not be construed as a commitment or representation by Dynalabs Ltd.

