
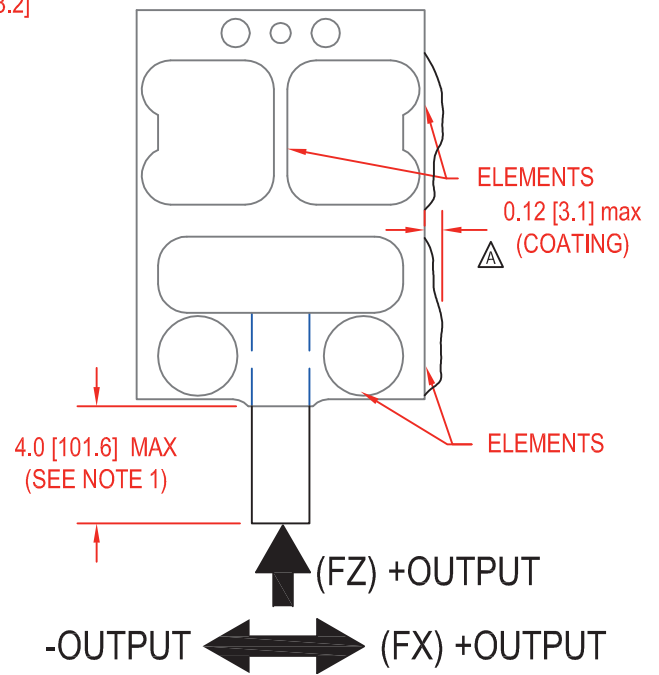
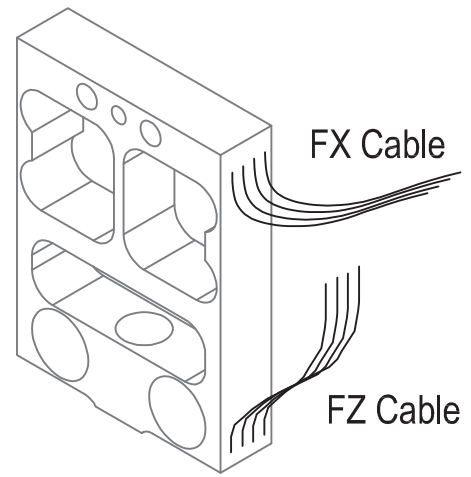


FUTEK MODEL QLA155

POSITION DETECTION AND SHEAR SENSOR

INCH (mm)		R.O.= Rated Output	
WIRING CODE (WC2)			
+Excitation	-Excitation	+Signal	-Signal
GREEN	BLACK	WHITE	RED

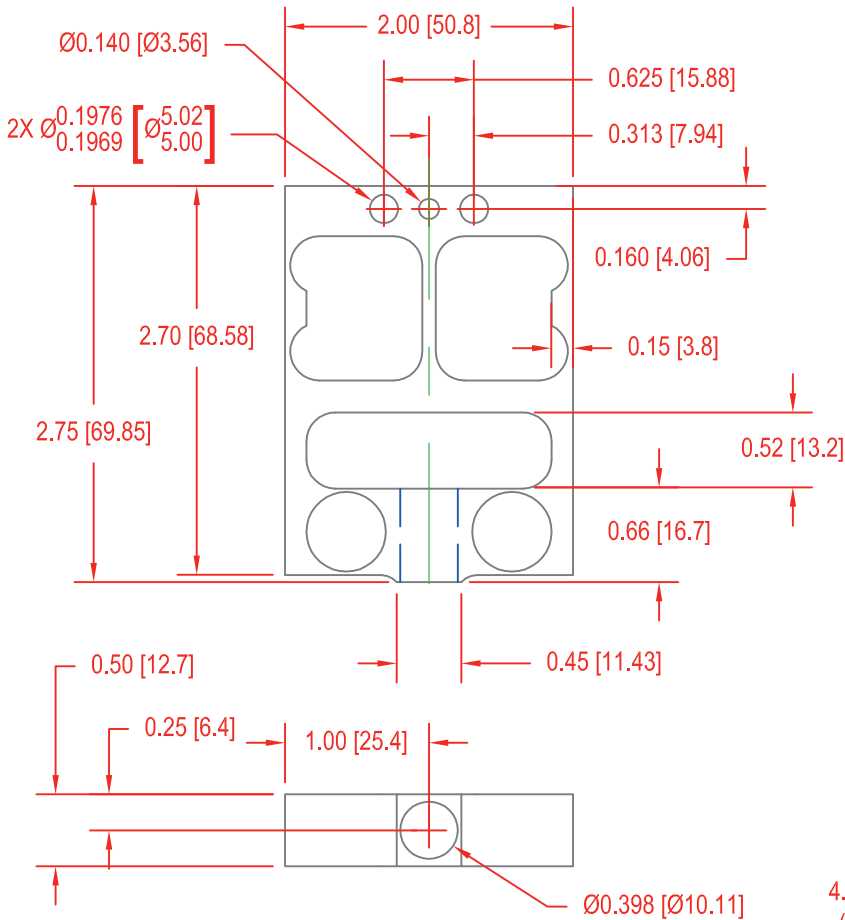

SPECIFICATIONS:

RATED OUTPUT	2 mV/V ±10% (FX). SEE CHART
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	1000Ω nom.
NONLINEARITY (FX)	±0.25% of R.O.
HYSTERESIS (FX)	±0.25% of R.O.
NONREPEATABILITY (FX)	±0.1% of R.O.
OPERATING TEMP.	0 to 160°F (-18 to 71°C)
MATERIAL	STAINLESS STEEL
CABLE: (2x) 29 Awg, 4 Conductor Spiral Teflon Cable, 6 in Long	

ITEM #:	CAPACITIES		Fz Rated Outputs (mV/V)
	Fx (lb)	Fz (lb)	
QSH01041	16	40	1.1-1.65
QSH01042	160	600	1.48-1.82

NOTES

- 1) MAXIMUM LENGTH IS 4.0 [101.6]. FUTEK RECOMMENDS NOT TO EXCEED 3.0 [76.2]

OLD REF. DWG F3945-E

OLD ITEM #S QSH00154 (Fx 12, Fz 40) - QSH00155 (Fx 120, Fz 600)

MATERIAL:

—

HEAT TREATMENT - FINISH:

—

REVISIONS: (Refer to dwg # revision sheet)

- 3-6-07
- 10-30-07
- 11-6-07
- 6-4-13

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

3rd ANGLE PROJ.



ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

CAGE: 1X8M6

DSPM Industria
sensori & trasduttori

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

Via Paolo Uccello, 4 20148 Milano
Tel +39 02 48 00 97 57 Fax +39 02 48 00 20 70
info@dspmindustria.it www.dspmindustria.it

MODEL: **QLA155**

DRAWN BY: H. AU

APPROVED BY: R. WALKER

DWG No.: **F01121-D**

CHECKED BY: -

DATE: **FEB. 20, 2006**