


CONNECTOR PIN OUT	
PIN	FUNCTION
1	TX+
2	TX-
3	RX+
4	PoE45+
5	PoE45-
6	RX-
7	PoE78+
8	PoE78-

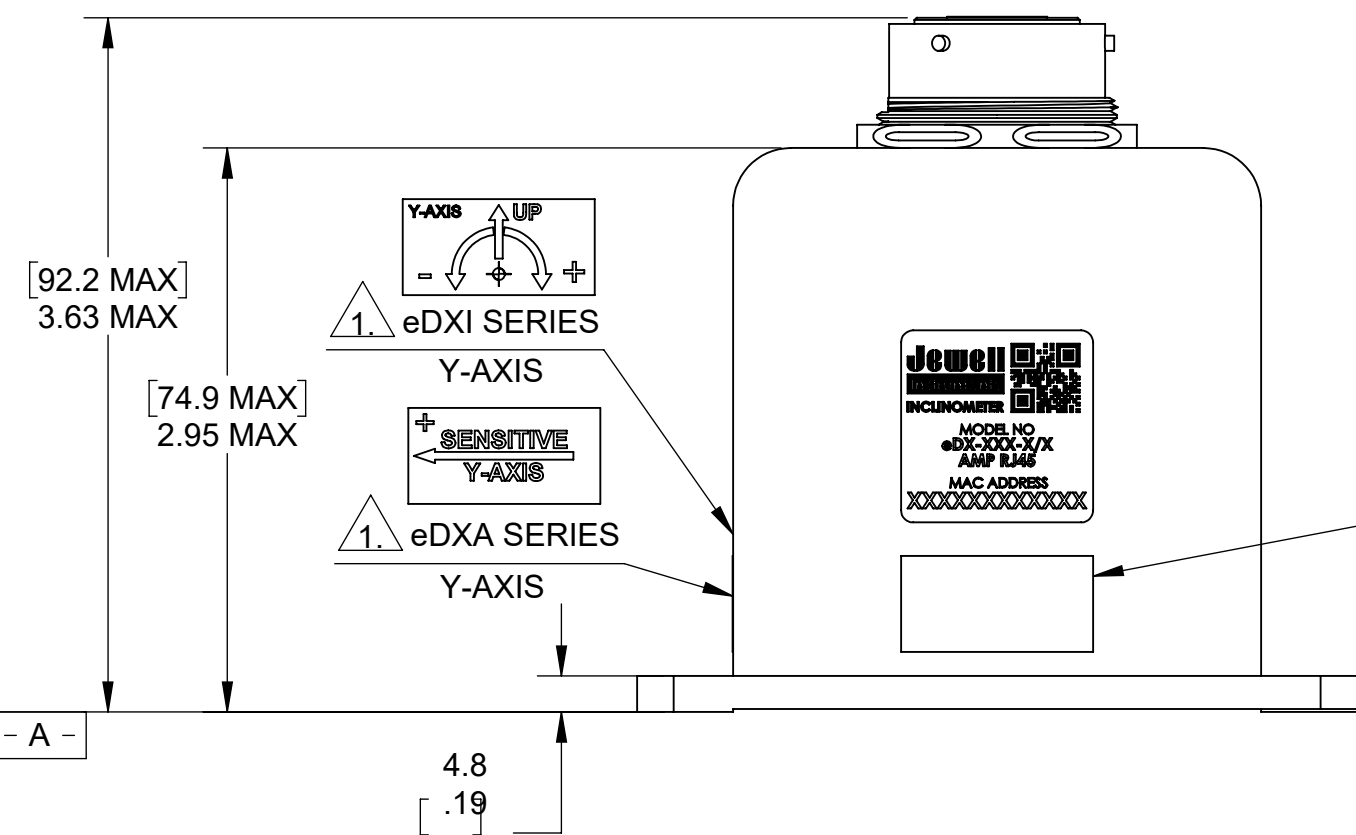

- NOTES:
- SENSITIVE AXIS LABEL VARIES BY MODEL. "-100" SERIES UNITS ARE SINGLE AXIS UNITS AND WILL NOT HAVE THE Y-AXIS.
 - DATUM - A - AND - B - ARE DEFINED AS REFERENCE SURFACES.
 - UNITS [mm]
INCH
 - MATING CONNECTOR:
VENDOR: AMPHENOL
PART NO: RJF6B

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING
USED ON	NEXT ASSY	TOLERANCE UNLESS SPECIFIED
		TWO PLACE DECIMALS (.00) ± .01
		THREE PLACE DECIMALS (.000) ± .005
		ANGLES ± 1°
		RAW MATL - COMMERCIAL STANDARD

Jewell Instruments
 MANCHESTER, NH
 TRIPLETT MODUTEC A&M EMICO

PROPRIETARY NOTICE
 THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.

TITLE eDX SERIES OUTLINE DRAWING	
DRAWING NO. OD02550380-000	REV C
SCALE 1:1	CAGE CODE 33005
SHEET 1 OF 1	