

HRL SERIES

ANCHOR LOAD CELL

FEATURES

- Monitors anchor forces and other force measurements
- Range: 600-3 000 kN
- Admissible overload: 120 % of the nominal load
- Maximum load: 300 % of the nominal load
- Suitable for heavy-duty use on construction sites
- Easy to assemble
- Protection class: IP66
- Special designs available upon request
- Option: Surge Protection



Fig. 1: HRL-4 | 600kN with LEMO connector and its screw-on cap

DESCRIPTION

HRL Series load cells consist of a high quality stainless steel. This compact load cell is designed specifically for heavy duty use on construction sites, with load cells that are available in the range of 600 to 3000 kN. Special designs are available upon request.

The attached shielded cable includes a water-proof connector with cap. Version without connector are available as an option. Cable lengths are customisable according to the installation requirements; for further information please contact us.

The data collected from the strain gauge is proportional to the applied force. The signal is transmitted to the monitoring unit for amplification.


APPLICATION

The Magtrol HRL Series load cells can be used to monitor anchor forces in classical and prestressed structures on sites (civil engineering, tunnels...) as well as a range of other static or dynamic measurements, in harsh, tropical, offshore, marine and harbour environments.



Fig. 2: HRL 4 (4 strands) mounted on cable anchor

SYSTEM CONFIGURATION

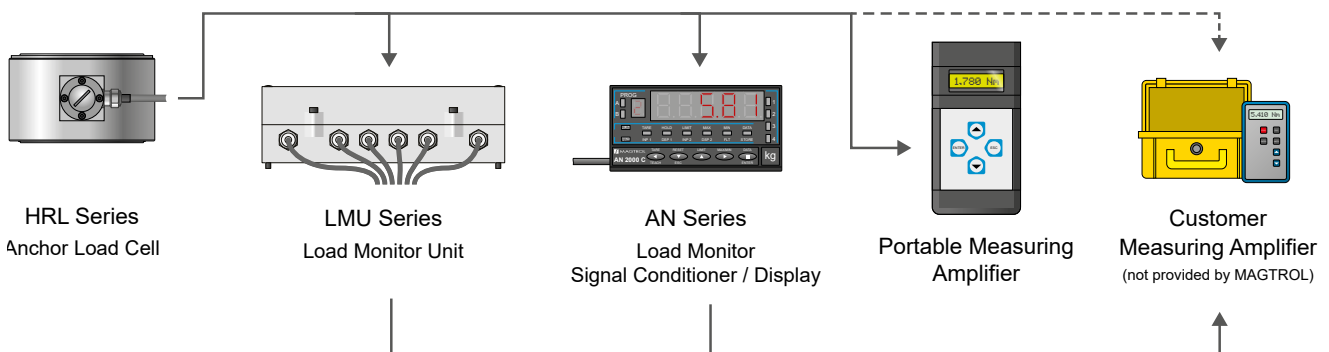

TECHNICAL DATA

MODEL	HRL-4-1000	HRL-7-1500	HRL-12-2000	HRL-19-3000
-------	------------	------------	-------------	-------------

MECHANICAL CHARACTERISTICS

Number of strands	4	7	12	19
Nominal Load (NL)	600kN	1000kN	2000kN	3000kN
Admissible Overload (% of NL)	120 %			
Overload at Rupture (% of NL)	>300 %			
Accuracy Class	1 % (of NL) ^{a)}			

ELECTRICAL CHARACTERISTICS

Nominal Sensitivity	1.98mV/V ± 1 %	2.2mV/V ± 1 %	2.12mV/V ± 1 %	
Input Resistance	700 - 1100 Ω			
Output Resistance	700 Ω			
Nominal Supply Voltage of Strain Bridge	5V to 10V			
Combined Error (Non-linearity + Hysteresis)	1 %			

ENVIRONMENT


Reference Temperature	+23 °C			
Operating Temperature	-30 °C to +70 °C			
Temperature Influence: On Zero	≤ ±0.01 % / K			
Temperature Influence: On Sensitivity	≤ ±0.01 % / K			
Protection Class	IP66			
Option: Surge Protection	up to 20kA (8/20 μs)			

ELECTRICAL CONNECTION

Connectic	Integrated cable with LEMO connector (several cable lengths are available on request)	
Wiring diagram (with standard connector LEMO)		
Wiring diagram (without connector)		

a) Accuracy depends on the environment, the assembly and the quality of the supports.

DIMENSIONS

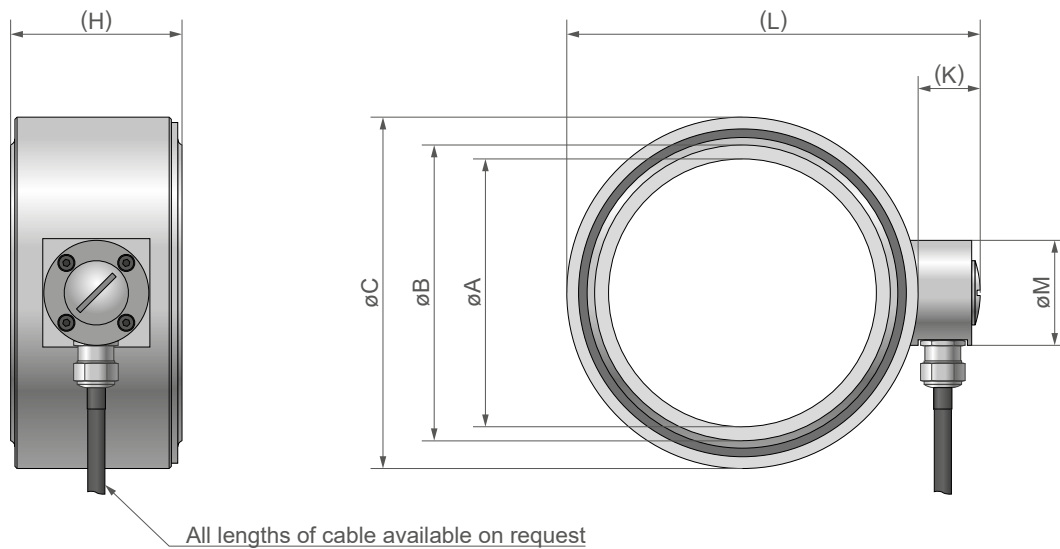


NOTE: All dimensions are in metric units.

MODEL	øA	øB	øC	H	K	L	M	Weight
HRL-4-1000	100	111	136	80	28	164	ø49	~4.5 kg
HRL-7S-1500	125	138	164	80	29	193		~5.8 kg
HRL-7-1500				100				~6.3 kg
HRL-12S-2000	160	181	206	80		235		~8.5 kg
HRL-12-2000				128				~9.5 kg
HRL-19-3000	190	216	242	130				271

NOTE: 3D STEP files of most of our products are available on our website: www.magtrol.com; other files are available on request.

ASSEMBLY

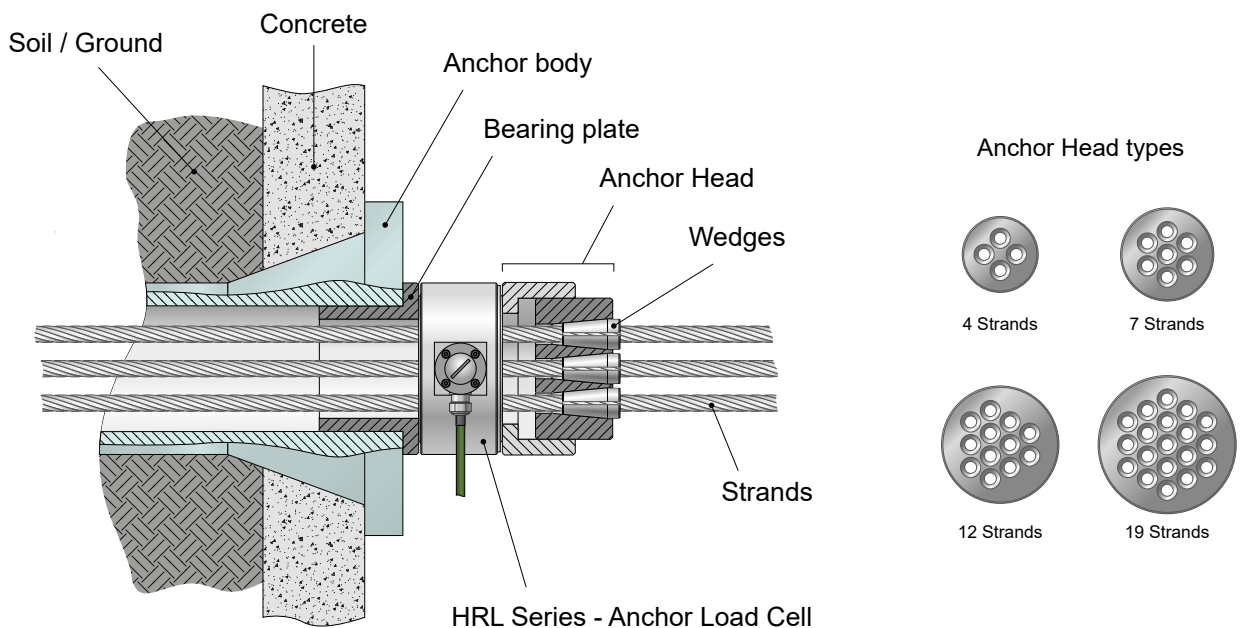

SYSTEM OPTIONS AND ACCESSORIES

PORTABLE LOAD MONITOR



Fig. 3: Portable Load Monitor

The measuring amplifier can process sensor strain gauge signals of $\pm 3.3 \text{ mV/V}$ and active signals of $\pm 10 \text{ V}$ or $0/4 \dots 20 \text{ mA}$. High measuring accuracy, paired with a fast measuring rate is ensured by using highly precise amplifiers and components, 16 Bits A/D converter and fast microcontroller.

10 parameter sets are available for sensors. The adjustment data, the sensor designation and the physical unit are stored here. Functions, such as tare, recall of min.-max. and/or delete min.-max. are available during the measurement.

Through its battery and/or accumulator operation, the Portable Load Monitor is portable applicable, but can also be supplied with an external power pack. It include a power-saving mode.

LMU SERIES - LOAD MONITORING UNIT



Fig. 4: LMU 217 | Load Monitoring Unit

The Magtrol Load Monitoring Unit is specially designed for strain gauge transducer applications. Specifically developed for use with Magtrol load measuring pins and load-force-weight sensors, the LMU Series provides excitation current and amplifies the output signal of full-bridge strain gauges. Configurable relays and analog outputs are also available.

Its IP 65 aluminum housing allows the system to be used in harsh environments.

AN SERIES - LOAD MONITOR DISPLAY WITH INTEGRATED SIGNAL CONDITIONER



Fig. 5: AN Series | Load Monitor Display with integrated signal conditioner

The AN Series Load Monitor is designed to process and display signals coming from various types of transducers (weight, load, pressure, torque, etc.) that use standard strain-gauge bridges.

The basic instrument is a soldered assembly composed of a main board, a tri-color programmable display and a power circuit. Standard features include the reading of the input variable as well as remote hold, reading and memorization of max and min values (peak / valley), tare and reset function.

Further information on accessories are available in their specific data sheets. Please, visite our website: www.magtrol.com

ORDERING INFORMATION

ORDERING NUMBER	HRL -	-	-	-	-	-	-	-	-
4, 7, 12, 19 : Number of strands									
Blank : Higher version S : Short version (see dimensions)									
600, ..., 3000 : Nominal load (see specifications)									
A : With connector B : Without connector C : Lightning and surge protection with connector D : Lightning and surge protection without connector									
Length of cable (in meter)									

Example: HRL Load Cell, 7 strands, with nominal load 1000kN, short version, with lightning protection, with connector and 8m cable would be ordered as follows: **HRL-7S-1000-C008**.

HRL Load Cell, 12 strands, with nominal load 2 000 kN, higher version, without lightning protection, without connector and 14 m cable would be ordered as follows: **HRL-12-2000-B014**.