

XPM5 Miniature pressure sensor



- Absolute, sealed and gauge ranges
10 to 350 bars [150 psi to 5 000 psi]
- Titanium device
- High level output in option
- For static and dynamic applications
- Linearity up to $\pm 0.25\%$ F.S.

DESCRIPTION

The **XPM5** is a miniature transducer designed to measure static and dynamic pressure under a wide variety of conditions, including hostile environments. The all-titanium construction and flush diaphragm allow the sensor to withstand most corrosive liquids.

The **XPM5** incorporates Measurement-Specialties' cutting edge SanShift™ technology, which virtually eliminates zero shifts caused by installation torque.

The **XPM5**'s sensing element is fitted with a fully temperature compensated Wheatstone bridge equipped with high stability micro-machined silicon strain gauges which optimize performance, especially at low ranges and frequencies. An on-board A1 amplifier for high level output is optionally available for all ranges, and an electrical connector interface is available for the standard low level output version.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. has the expertise to customize and/or design sensors for specific uses and testing environments. To meet your needs we also offer complete turnkey systems. Our conditioning electronics can power the sensor, amplify the electronic signal, and display the data digitally. A turnkey measurement system arrives with matched components, formatted, calibrated and ready for your immediate use.

FEATURES

- Flush Diaphragm
- Low Installation Torque Sensitivity
- M5x0.8 thread
- High Level Tension Output Available
- For Static and Dynamic Applications

APPLICATIONS

- Corrosive and explosive liquids regulation
- Extreme Miniature Devices
- Onboard equipment monitoring
- Breaking system pressure
- Laboratory and research

STANDARD RANGES

Range in bar	0-10	0-20	0-35	0-50	0-100	0-200	0-350
Range in psi	0-150	0-300	0-500	0-750	0-1500	0-3000	0-5000

XPM5 Miniature pressure sensor

CHARACTERISTICS

All values are typical at temperature 20±1°C

Parameters	
Operating Temperature Range (OTR)	-40 to 120 ° C [-40 to 248 ° F]
Compensated Temperature Range (CTR)	0 to 60 ° C [32 to 140 ° F]
Zero Shift in CTR	<2.5% F.S./ 50° C [100° F]
Sensitivity Shift in CTR	<2% of reading /50 ° C [100 ° F]
Range (F.S.)	See standard ranges table
Tightening Torque	
Nominal (zero and sensitivity shift <1%)	1.8 N.m [15 lbf.in]
Maximal	3 N.m [25 lbf.in]
Over-Range	
Without Damage	2x F.S
Without Destruction	5xF.S.
Accuracy	
Linearity	±0.25% F.S.
Hysteresis	±0.25% F.S
Repeatability	±0.2% F.S

Electrical Characteristics



Model	XPM5	XPM5-A1
Supply Voltage	10 Vdc	10 to 30 Vdc
F.S. Output	100 mV	4 V ±5%
Zero Offset	<±10 mV	0.5 V ±5% F.S.
Input Impedance/Consumption	1500 Ω	<25 mA
Output Impedance	800 Ω	1 kΩ ⁶
Insulation under 50Vdc	≥100 MΩ	≥100 MΩ

Notes

1. Electrical Termination: Shielded Ø3 mm cable with 4 wires (AWG30), standard length 2.0 m [6.6 ft] with strain relief spring
2. Material: Body and flush diaphragm in titanium; laser welded
3. Protection Index: IP50
4. Resonance Frequency: 100-800kHz depending on range
5. Self-centered, sealing ring supplied with the sensor
6. Output impedance standard, available <100Ω on request.
7. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

XPM5 Miniature pressure sensor

DIMENSION & WIRING SCHEMATIC (IN METER AND IMPERIAL)

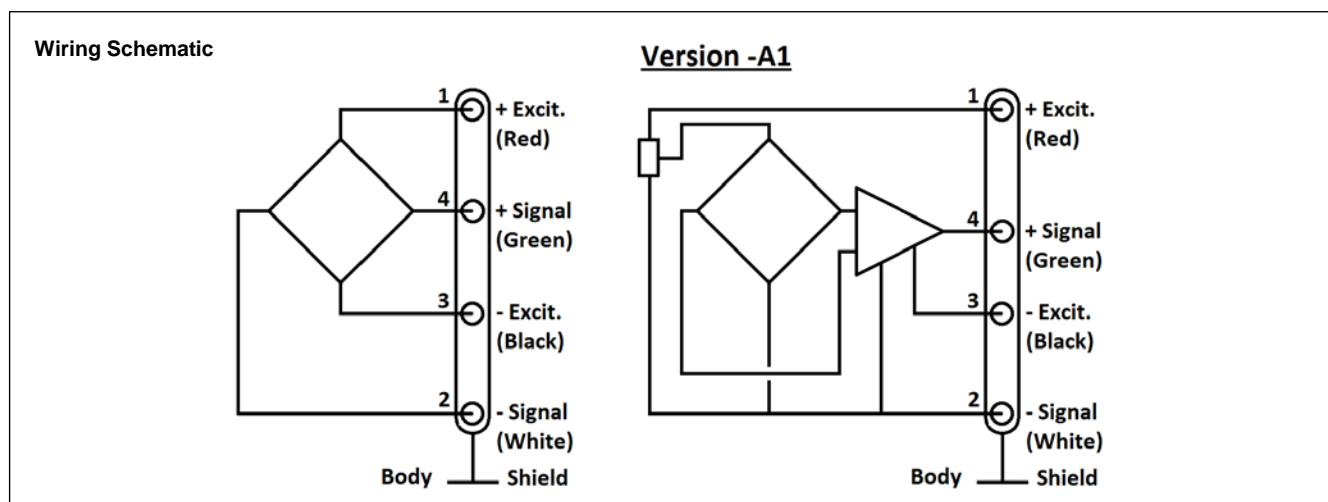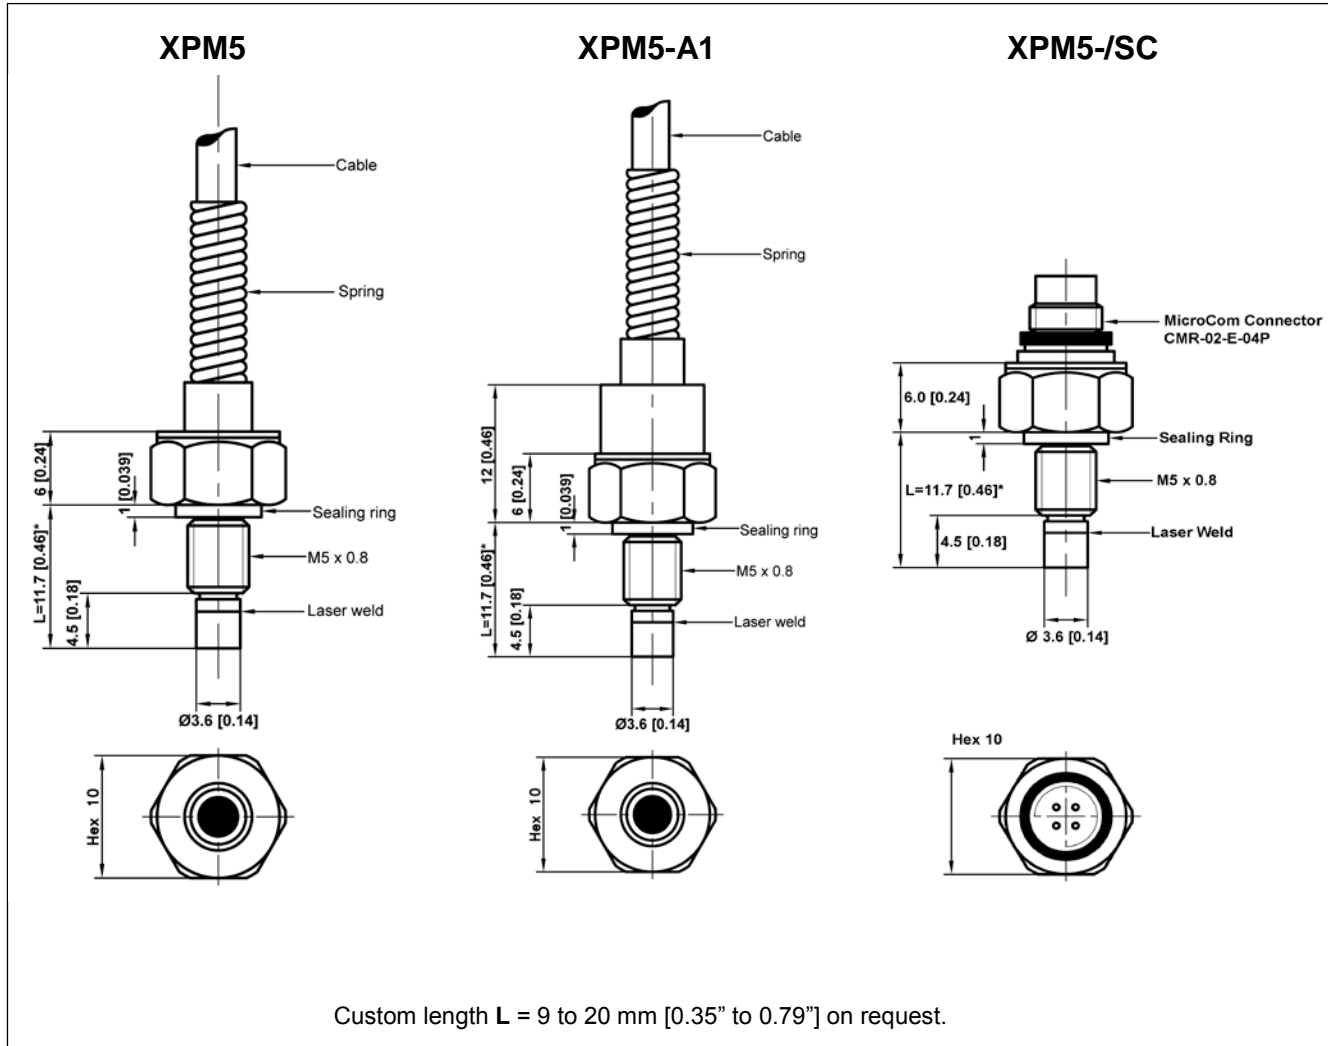


XPM5 Miniature pressure sensor

OPTIONS

A : Absolute
G : Gauge
S : Sealed Gauge
A1 : Amplified Tension output with unipolar power supply
HA : Accuracy (CNL&H) $\leq \pm 0.25\%$ F.S.
SI : Sensitivity shift in CTR $\leq 1\%$ of reading / 50 ° C [100 ° F]
ZI : Zero shift in CTR $\leq 1.5\%$ F.S. /50 ° C [100 ° F]
ET1 : CTR -20 to 100 ° C [-4 to 212 ° F]
ET3 : CTR -40 to 150 ° C [-40 to 302 ° F] OTR=CTR (not available with A1/P7 options)
ET7 : CTR -20 to 120 ° C [-4 to 248 ° F] OTR=CTR (available only with P7 option)
SC : Connector output, prewired, cable length 2 m [6.6 ft]
P5 : IP65 protection (available only for Absolute and Sealed Gauge versions)
P7 : IP67 protection (available only for Absolute and Sealed Gauge versions)
L00M : special cable length, replace "00" with total length in meters

ORDERING INFORMATION

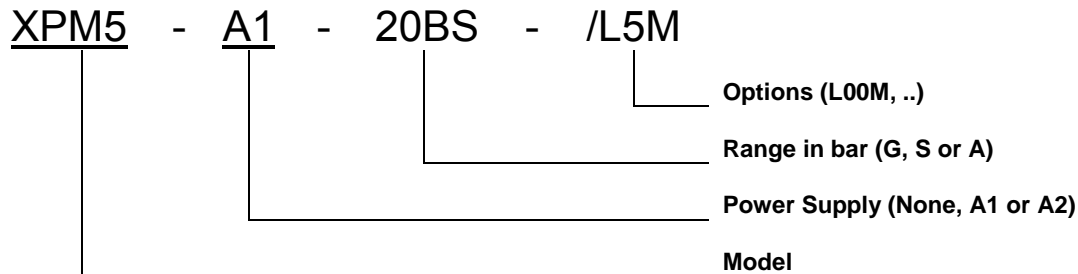

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.